




SX-017-1

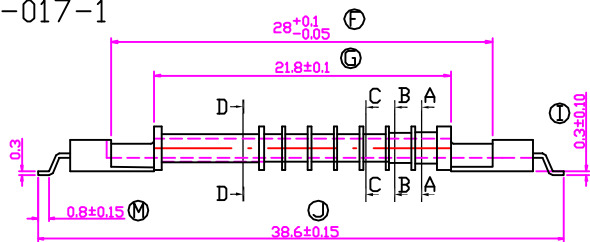


SX-017-2

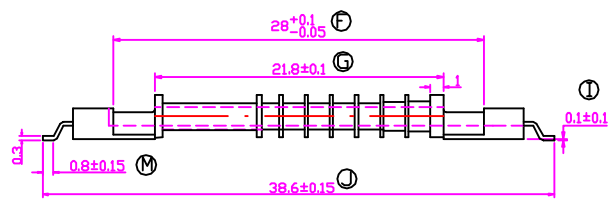

SX-017-3

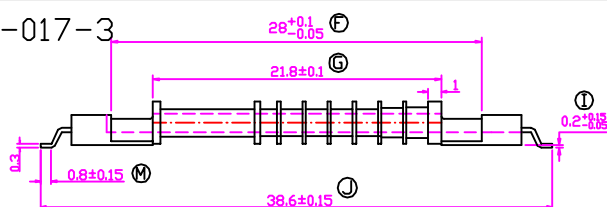

SX-017-4

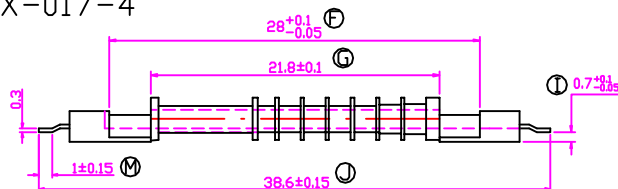

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
A			C		
B			D		
DRAWN & DRAFTED BY	刻 亚	TOLERANCES		ANGLE:	TITLE:
CHECKED & APPROVED BY	陈圣元	0<L≤4 ±0.1	PIN PITCH	±1°	UI-8.5 8SEC 6PIN
		4<L≤16 ±0.2		UNIT: MM	BOBBIN MATERIAL: L.C.P E-4008/HM-402
		16<L≤63 ±0.3		SCALE: FIT	PIN MATERIAL: PHOSPHOR BRONZE
SX 深圳市三湘源电子科技有限公司 SANXIANG ELECTRONICS FACTORY TEL: 86-755-28981958 FAX: 86-755-28981066			DATE: 2009.03.02		UL REC. UL 94V-0
			DRAWING NO: SX-D017		PIN TENSION LOAD: 1.2Kg
			REV. 0		