


SX-1502-1

| | | |
|-------------|------------------------|---------------------|
| REV: | DESCRIPTION | DATE |
| A | INITIAL RELEASE | 2010. 05. 12 |
| B | | |
| C | | |



深圳市三湘源电子科技有限公司
 SHENZHEN SANXIANGYUAN ELECTRONIC TECHNOLOGY CO., LTD.

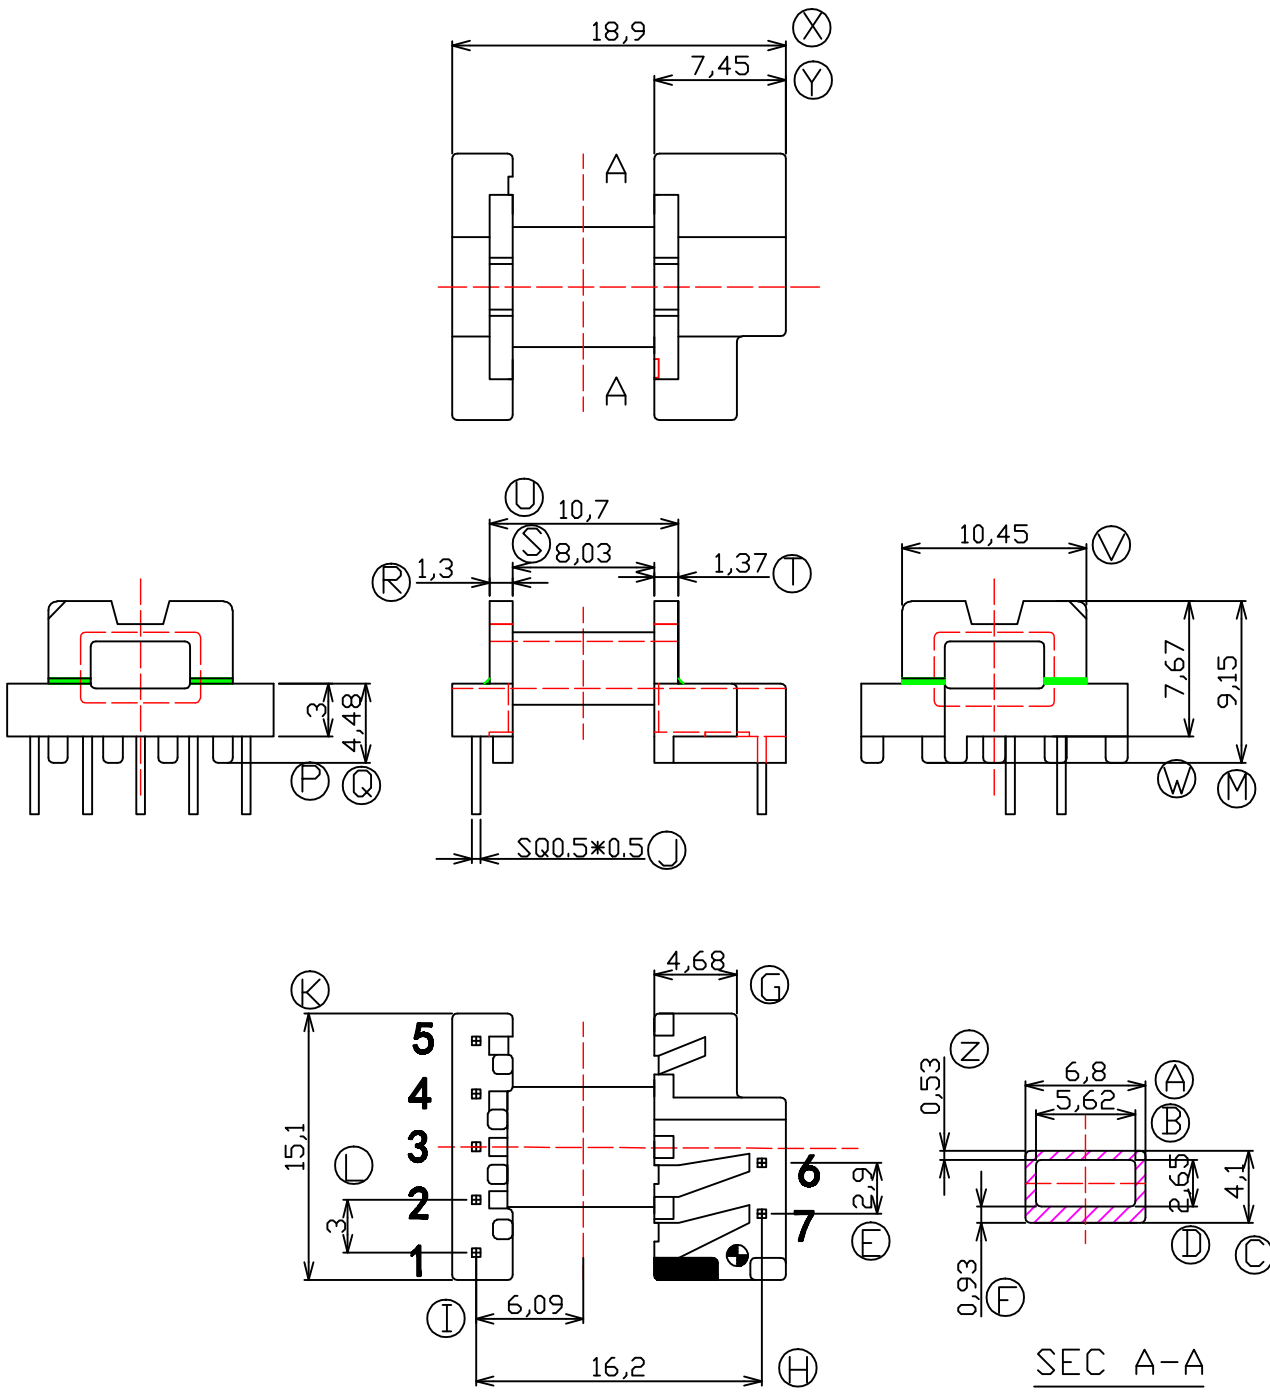

TEL:86-755-28981958
FAX:86-755-28981066

ANGLE:
 ± 1

UNIT:
MM

TITLE: **BOBBIN EFD15 (5+2PIN)**

UL REC:
UL 94V-0

BOBBIN MATERIAL:
PHENOLIC

| | |
|-------------------------|-------------------|
| CHECKED & DRAFTED BY | PENG. D. W |
|-------------------------|-------------------|

| TOLERANCE |
|--------------------------|
| $0 < L \leq 4 \pm 0.1$ |
| $4 < L \leq 16 \pm 0.2$ |
| $16 < L \leq 63 \pm 0.3$ |

| |
|-----------|
| PIN PITCH |
| ±0.2 |

SCALE:
FIT

PIN TENSION LOAD:
1.0kg

PIN MATERIAL:
CP WIRE

CHECKED & APPROVED BY **CHEN. S. Y**

DATE: 2012/09/05

DRAWING NO:
SX-1502-1

REV: 0