

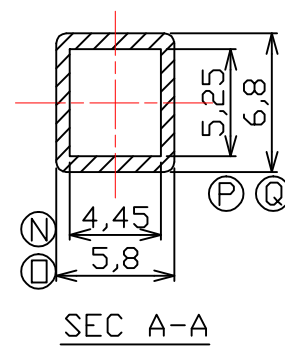
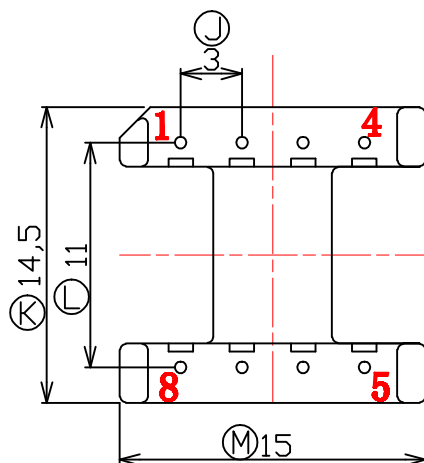


# SX-1603-2

| REV: | DESCRIPTION     | DATE       |
|------|-----------------|------------|
| A    | INITIAL RELEASE | 2012.07.02 |
| B    |                 |            |
| C    |                 |            |

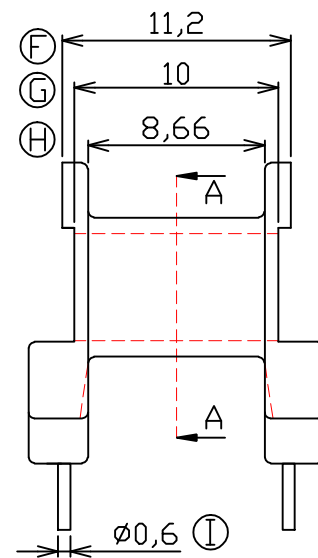

深圳市三湘源电子科技有限公司  
SHENZHEN SANXIANGYUAN ELECTRONIC TECHNOLOGY CO., LTD.

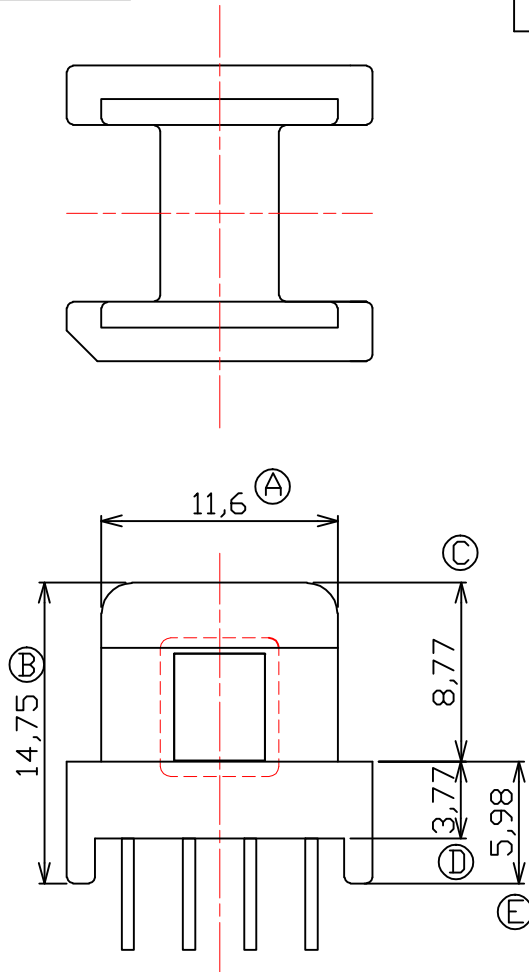


TEL:86-755-28981958  
FAX:86-755-28981066

ANGLE:  
±1°

UNIT:  
MM

SCALE:  
FIT



TITLE:  
**BOBBIN EI16 (4+4PIN)**

UL REC:  
**UL 94V-0**

PIN TENSION LOAD:  
**1.0kg**

DATE:  
**2012/09/05**

BOBBIN MATERIAL:  
**PHENOLIC**

PIN MATERIAL:  
**CP WIRE**

DRAWING NO:  
**SX-1603-2**

REV:  
**0**

CHECKED & DRAFTED BY  
**PENG. D. W**

CHECKED & APPROVED BY  
**CHEN. S. Y**

TOLERANCE  
0<L≤4 ±0.1  
4<L≤16 ±0.2  
16<L≤63 ±0.3

PIN PITCH  
±0.2