

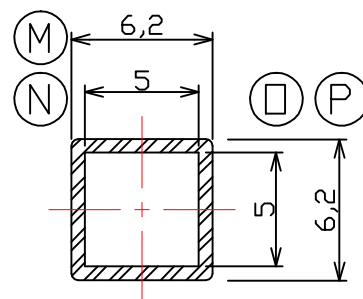
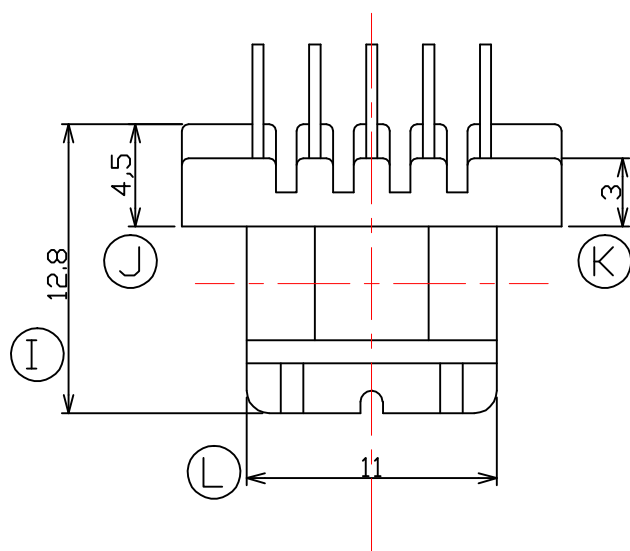


SX-1606

| REV: | DESCRIPTION | DATE |
|------|-----------------|------------|
| A | INITIAL RELEASE | 2012.09.10 |
| B | | |
| C | | |

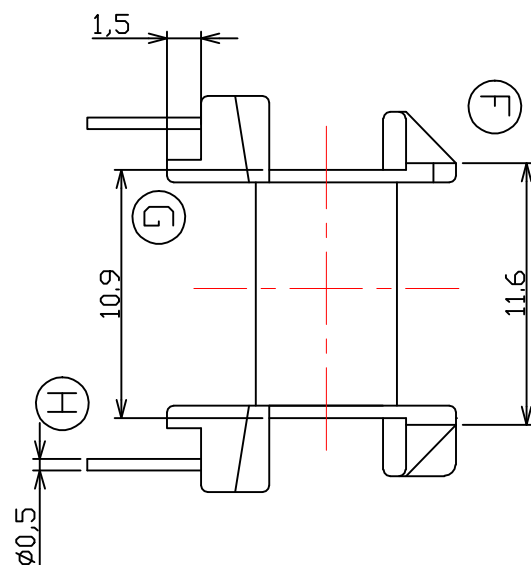

深圳市三湘源电子科技有限公司
SHENZHEN SANXIANGYUAN ELECTRONIC TECHNOLOGY CO., LTD.

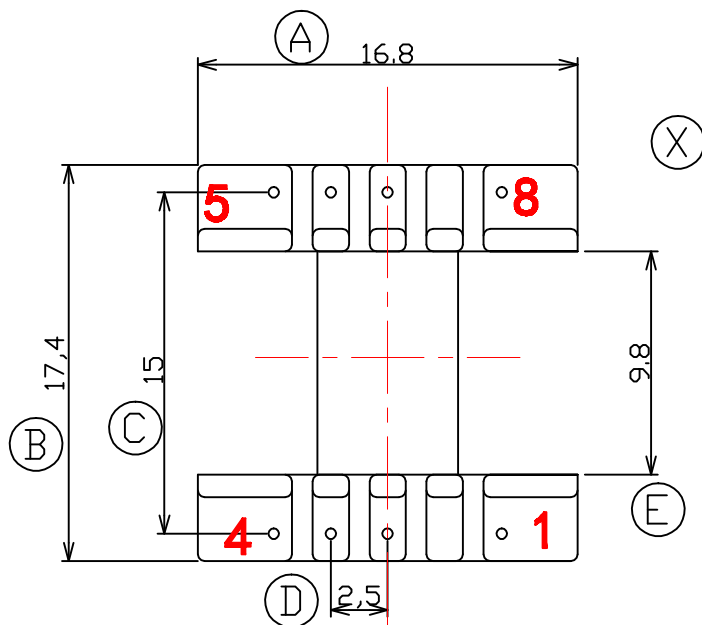


TEL:86-755-28981958
FAX:86-755-28981066

ANGLE:
 $\pm 1^\circ$

UNIT:
MM

SCALE:
FIT



TITLE:
BOBBIN EF16 (4+4PIN)

UL REC:
UL 94V-0

PIN TENSION LOAD:
1.0kg MIN

DATE:
2012/09/05

BOBBIN MATERIAL:
PHENOLIC

PIN MATERIAL:
CP WIRE

DRAWING NO:
SX-1606

REV:
0

CHECKED &
DRAFTED BY

PENG. D. W

CHECKED &
APPROVED BY

CHEN. S. Y

TOLERANCE

0<L≤4 ±0.1
4<L≤16 ±0.2
16<L≤63 ±0.3

PIN PITCH

±0.2

1

2

3

4

5

6