

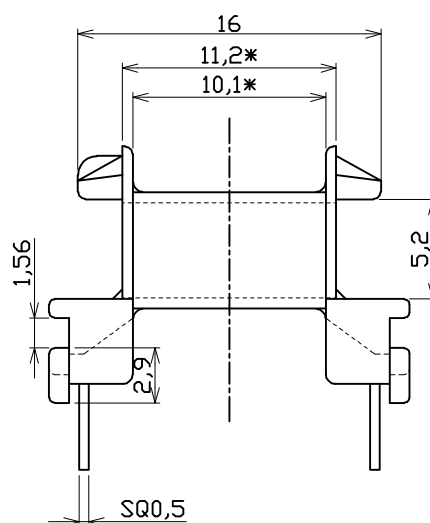
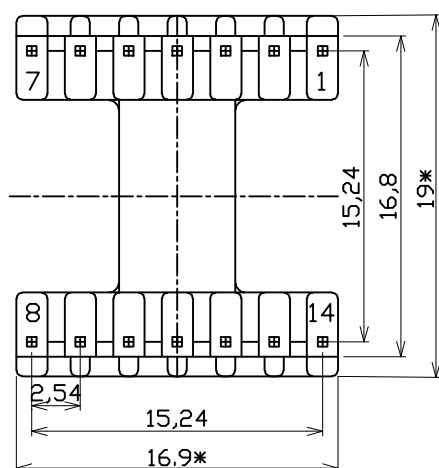
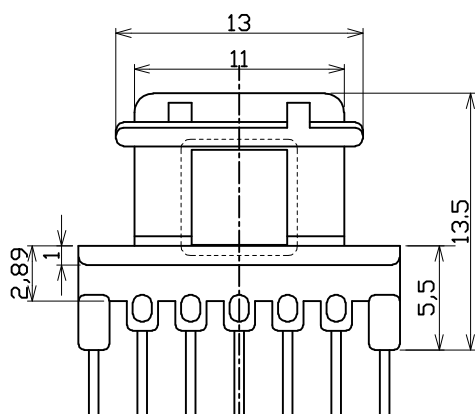


SX-1630


REV:	DESCRIPTION	DATE
A	INITIAL RELEASE	2007.07.01
B	PIN座处增加1MM筋条	2010.03.02
C		

注：标注*为重点管控尺寸

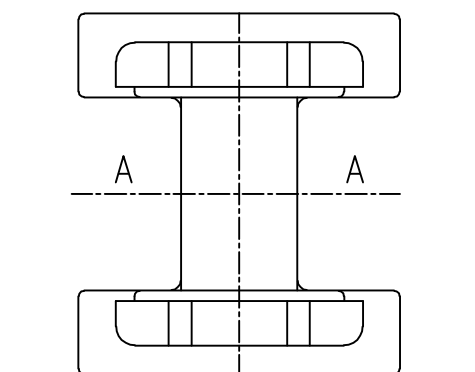

SEC A-A

深圳三湘源电子科技有限公司
SHENZHEN SANXIANGYUAN ELECTRONIC TECHNOLOGY CO., LTD.




TEL:86-755-28981958
FAX:86-755-28981066

ANGLE:
±1°

UNIT:
MM

SCALE:
FIT



TITLE:
BOBBIN EF16 (7+7PIN)

UL REC:
UL 94V-0

PIN TENSION LOAD:
1.0kg

DATE:
2012/09/05

BOBBIN MATERIAL:
PHENOLIC

PIN MATERIAL:
CP WIRE

DRAWING NO:
SX-1630

REV:
0

CHECKED & DRAFTED BY
PENG. D. W

CHECKED & APPROVED BY
CHEN. S. Y

TOLERANCE
0<L≤4 ±0.1
4<L≤16 ±0.2
16<L≤63 ±0.3

PIN PITCH
±0.2