


SX-2808-2

REV:	DESCRIPTION	DATE
A	INITIAL RELEASE	2006.07.19
B		
C		



深圳市三湘源电子科技有限公司
SHENZHEN SANXIANGYUAN ELECTRONIC TECHNOLOGY CO., LTD.

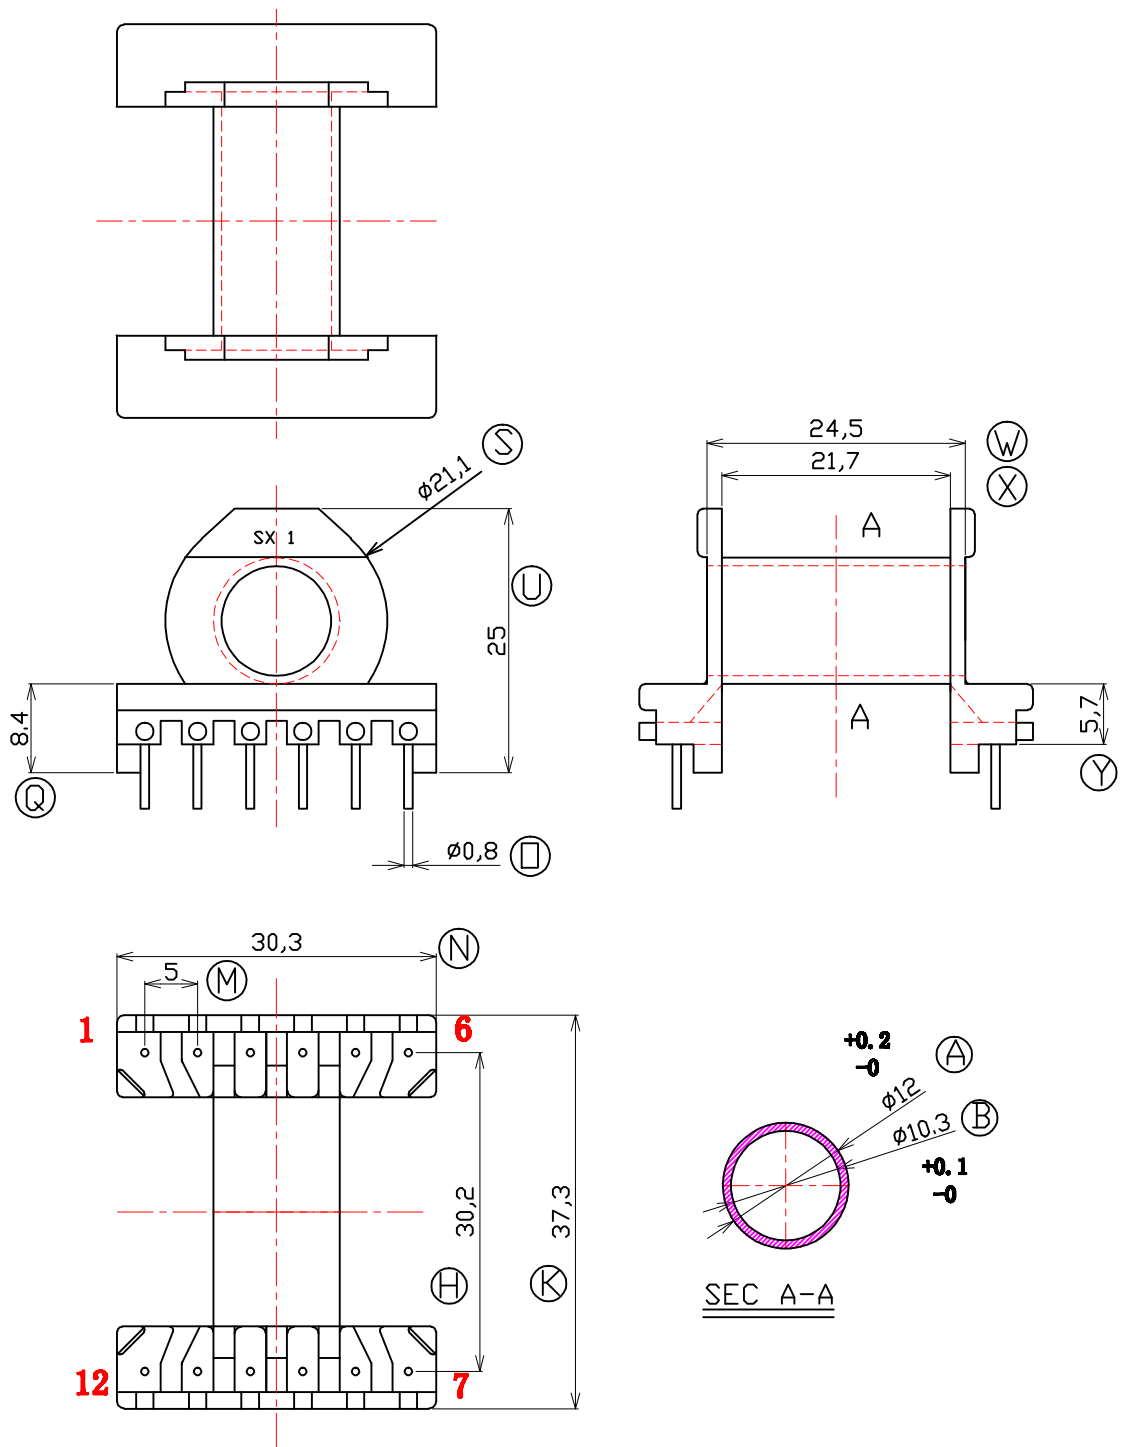


TEL:86-755-28981958
FAX:86-755-28981066

ANGLE:
 $\pm 1^\circ$

UNIT:
MM

SCALE:
FIT



TITLE:

BOBBIN ERL28 (6+6PIN)

UL REC:
UL 94V-0

BOBBIN MATERIAL:
PHENOLIC

CHECKED & DRAFTED BY
PENG. D. W

TOLERANCE
0<L≤4 ± 0.1
4<L≤16 ± 0.2
16<L≤63 ± 0.3

PIN PITCH
 ± 0.2

PIN TENSION LOAD:
1.5kg MIN

PIN MATERIAL:
CP WIRE

CHECKED & APPROVED BY
CHEN. S. Y

DATE:
2012/09/05

DRAWING NO:
SX-2808-2

REV:
0

1

2

3

4

5

6